


TASK: Adjust Shade Height on Shades with Smart Pull Control with or without a Cassette Valance

Use If/When: Shade does not reach desired height

Tools Needed: Screwdriver

Note: Step 1 is for inside mount shades only. Skip this step for outside mount shades.

1. Raise shade completely, then remove shade from the installation brackets by pushing up on clear piece in bracket and roll top of cassette valance towards the room.



2. For shades with a cassette valance, remove cassette valance by turning tabs down (open) and sliding valance out towards room.

Note: For shades with no cassette valance, skip this step.

Closed



Open



3. Push tab (front tab) towards room and hold while rotating screwdriver in the following direction.

Right Control: Lower – Clockwise
Raise – Counter Clockwise


Left Control: Lower – Counter Clockwise
Raise – Clockwise

NOTE: Opposite rotation for REVERSE ROLL



Right Control



Left Control

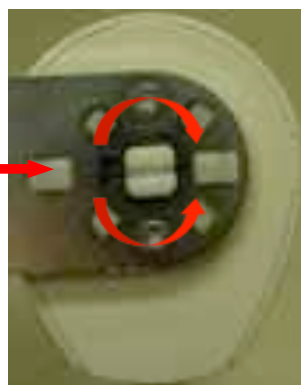

4. If shade has a cassette valance, reinsert cassette valance onto shade by sliding end of shade into cassette valance and then turn tabs to lock in cassette valance.

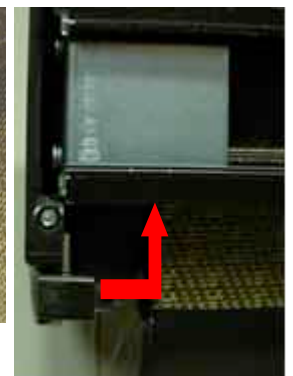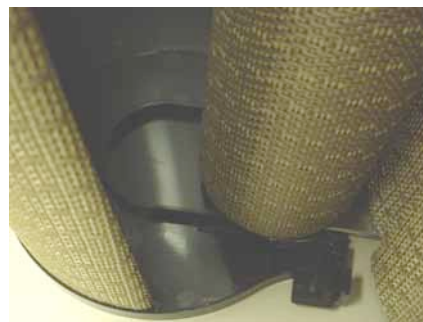


TASK: Adjust Shade Height on Shades with Smart Pull Control with or without a Cassette Valance

Use If/When: Shade does not reach desired height

Tools Needed: Screwdriver

5. If shade was uninstalled, reinstall shade into installation brackets. Rest backer bar on bottom of brackets, then rotate up until shade snaps in place.



6. Lower shade to ensure shade lowers to desired height. Repeat steps if more adjustment is needed.

